

JS100-C1

Compact Siren Speaker



FEATURES

- Improved speaker driver unit tested for extreme temperature test and weather tests for long-lasting durability.
- High sound pressure output exceed SAE requirement.
- Compact and durable design with Fibre Reinforced Nylon housing & Cast Aluminium driver unit.
- Industrial standard L-Bracket and U-Bracket for versatile installation.

SPECIFICATIONS

Compliant: SAE J1849 (EVS3), CA Title 13
(when used with compatible JULUEN 100W Siren Amplifier)

Driver: Neodymium Magnet

Rated Wattage: 100W

Impedance (AC): 11 Ω

DC Resistance: 7.2 Ω

Weight: 2.05 Kg

Housing: Fibre Reinforced Nylon and Cast Aluminium


Storage Temperature: -40°C~75°C

IP Rating: IP54K


Sound Output: 121.83 dBA @ 3M (9.84')

Wires: White (SPK+) - 35cm (20AWG)
Black (SPK-) - 35cm (20AWG)

SOUND PRESSURE LEVEL

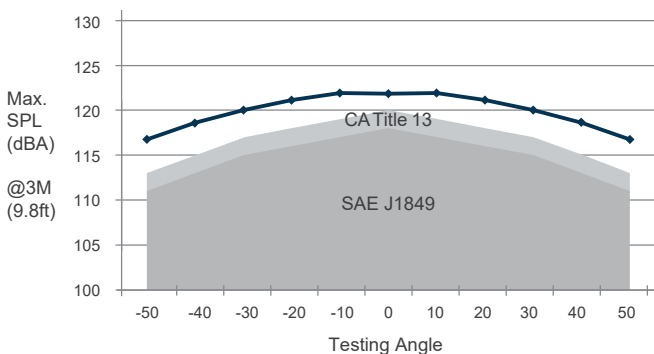

DIMENSIONS

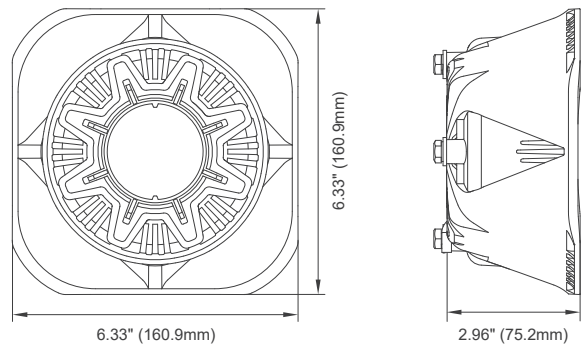

PART NO.

- H003-10111-000 (Speaker w/o Bracket)
- H003-11111-000 (Speaker w/ L-Bracket)
- H003-12111-000 (Speaker w/ U-Bracket)
- 99-H003X01-000 (Service Part) (Replacement driver only)

ACCESSORIES

- 99-H003M00-000
L-Bracket



- 99-H003M01-000
U-Bracket

