

JS100-C1

Compact Siren Speaker

FEATURES

- High performance siren speaker that exceed SAE requirement.
- Powerful Neodymium magnet that produce more than 124.5dB over 3M (9.8ft) distance.
- Tested for efficiency and reliability with SAE J1849.
- Compact and durable design with Fibre Reinforced Nylon housing & Cast Aluminium driver unit.
- Industrial standard L-Bracket and U-Bracket for versatile installation.

SPECIFICATIONS

Compliant: SAE J1849 EVS2, CA Title 13

Driver: Neodymium Magnet

Rated Wattage: 100W

Impedance (AC): 11 Ω

DC Resistance: 4.3 Ω

Weight: 2.05 Kg

Cooling Method: Ferro Fluid Cool

Housing: Fibre Reinforced Nylon and Cast Aluminium

Operating Temperature: -30°C~65°C


Storage Temperature: -40°C~75°C

IP Rating: IP54K


Sound Output: 124.5 dBA @ 3M (9.84')

Wires: White (SPK+) - 35cm (20AWG)
Black (SPK-) - 35cm (20AWG)

SOUND PRESSURE LEVEL

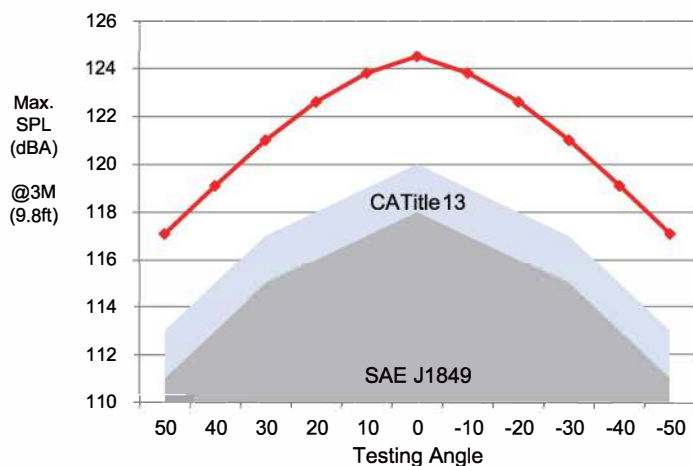

DIMENSIONS

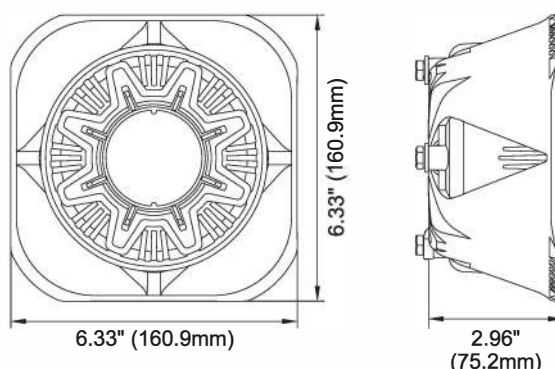

PART NO.

- H003-10111-000 (Speaker w/o Bracket)
- H003-11111-000 (Speaker w/ L-Bracket)
- H003-12111-000 (Speaker w/ U-Bracket)
- U001-00110-000 (Replacement driver only)

ACCESSORIES

- 99-H003M001-000
L-Bracket



- 99-H003M002-000
U-Bracket

